

Eco-Tech General Packaging Specification For Coiled Product

Specification # CP1

- All coils must be tied with the proper colored strapping in a minimum of three (3) places
- All coils must be placed on pallet with tail (end) facing the large entry direction.


- Pallets must be banded in two places: top of stack to the bottom of stack, and looped around the pallet.

-On 1 x 24 wide only! A wooden board is to be attached to the end of the coil. The banding must also be wrapped around the coil

-All top coils must have corrugated (cardboard) or foam in between the band and the top coil.

-All pallets must have pallet tags and labels (if provided in job jacket). Label location will be on the last coil facing the pallet entry direction. labels will be completed and stapled to top coil.

-Pallets should be coiled and stacked according to job jacket instructions (ie.. double coil/ boards per pallet)

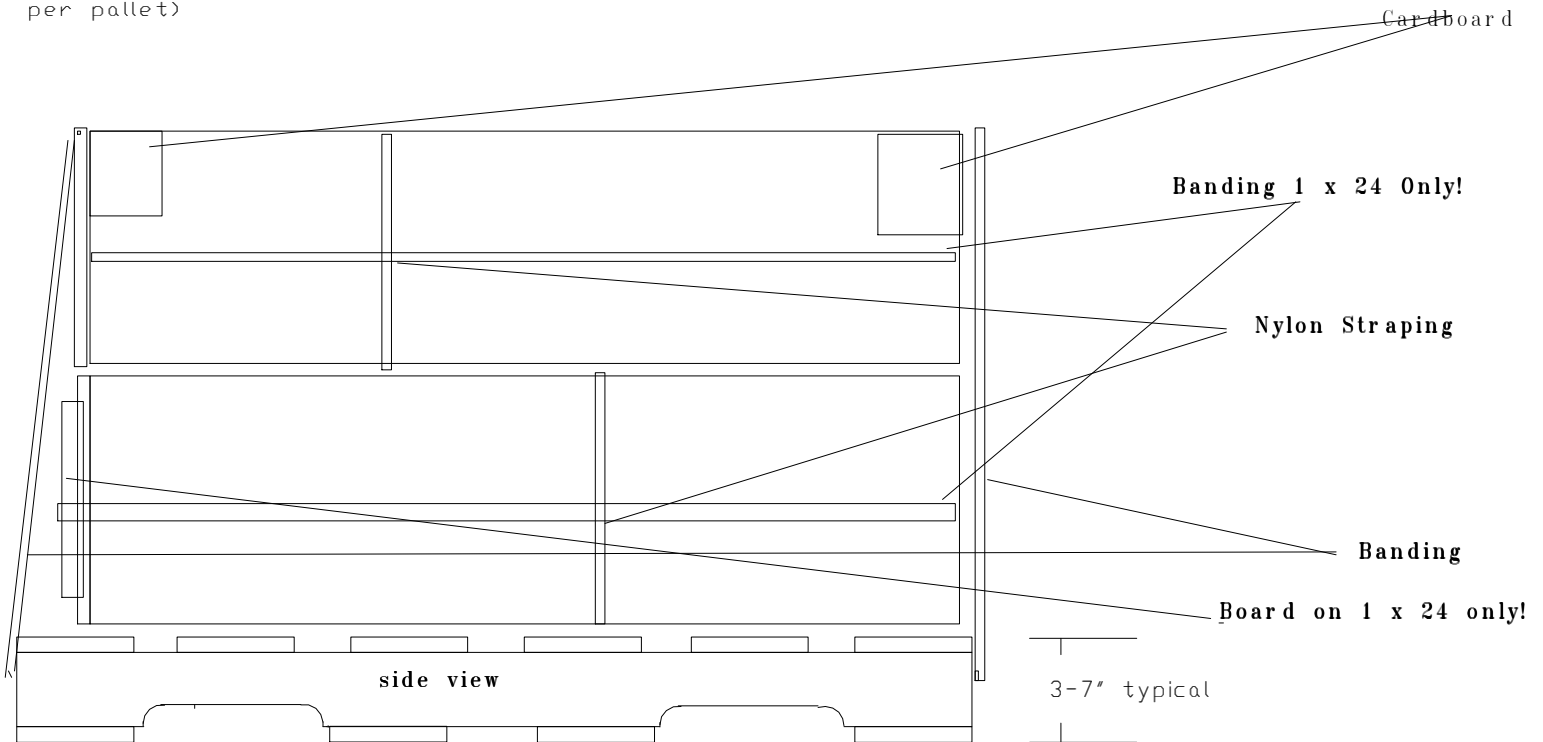

-Labels should be on the entrance of each pallet

Eco-Tech Approval President

Eco-Tech Approval Sales

Customer (Name) Approval